

DHL49

49" Full-HD LCD Monitor



Features :

- Industrial level DID LCD panel, suitable for extensive 7x24 continuous works
- High fidelity digital processing, brilliant and vivid video
- Built-in 3D COMB filter and 3D Noise Reduction
- Abundant interfaces HDMI, DVI, VGA, BNC, support video loop
- Brightness smart detection, power-saving
- Using Tamper-proof metal housing, no radiation
- Built-in power, low energy consumption, ultra-quiet



Technical Specification

Model

Model	DHL49
-------	-------

System

Diagonal	49"(16:9)
Resolution	1920×1080 (FHD)
Backlight	LED
Brightness/Luminance (Standard)	450 cd/ m ²
Contrast	1100:1
Angle of view	178°/178°(vertical/horizontal)
Response time	5.8ms

Signals

Input	standard	CVBS(BNC)×2, VGA(D-Sub)×1, DVI-D×1, HDMI×1, RS232×1, USB×1
	optional	Audio×1, RJ45×1, HDCVI×1, SDI×1, DP×1
Output	Standard	CVBS(BNC)×2, RS232×1
	optional	Audio×1, DP×1

General



Consumption (Standard)	60W
Consumption (Standby)	≤1W

Power Supply	AC100~240V (+/-10%),50/60 Hz
Weight	15kg
Dimensions(no base)	1127.1×667.3×52.9mm
Work Environment	Temperature:0 C~50 C
	Humidity:20%~90%

Accessory

Standard	VGA cable, power cable
Optional	Pedestal, hanging bracket

Dimensions(mm)

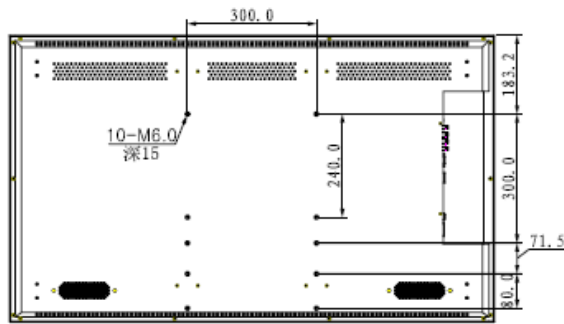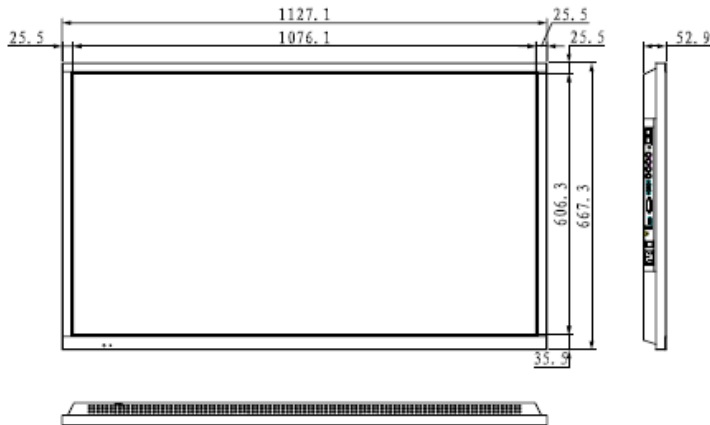

AC100 ~ 240V 1.2A 50/60 HZ	ON			CVBS1		CVBS2					
AC IN	OFF										