Shield 5

Shield Series Alarm System

schutz-tech.com

Technical Para













- 4.3-inch IPS full-color display
- 5000mAh Libattery, standby time is 32 hrs
- Wireless connection
- Type-C power port + 2 pin 12V power input slot for project installation
- Louder siren
- Support up to 200 accessories
- Two-way calls function
- 5 groups of preset alarm calls
- Low battery alarm
- Support anti-dismantling alarm
- Support Smart Life APP
- Support Amazon Alexa
- Support Google Assistant
- 600MHz high-speed smart chip
- Built-in 10 languages

| | | | ≒ 👚 🖿 15:52 | |
|--------|------------------------------|-----------------|-------------|--|
| | 15:52 ₁₅₋₀₆₋₂₃ | Système désarmé | sos (H) | |
| | Armer | Désarmer | Malson | |
| | | \bigcirc | | |
| ametei | | | | |

| Power supply | DC5V 2A Type-C USB |
|--------------------------------|------------------------------|
| Built-in battery | 3.7V 5000mAh lithium battery |
| Working power consumption | <5W |
| Working temperature | -10°C∼+50°C |
| Relative humidity | <95% (no condensation) |
| Wireless parameters | 433MHz |
| • WiFi | 2.412Ghz to 2.484Ghz < 20dBm |
| Bluetooth Working frequency | 2402MHz to 2480MHz < 20dBm |
| Mobile standard | 2G |
| WiFi standard | IEEE802.11b/g/n 2.4GHz |
| Product size | 105x120x15,5mm |


Led Connector

Red/Green

| Color | Panel status |
|--------------|--------------|
| Red | Alarming |
| Yellow | Armed |
| Green | Disarmed |
| Flashing | Panel status |
| Yellow/Green | Delay Arming |

Delay Alarming

| 1 |
|-------------------|
| |
| 4,3" Touch Screen |
| · Mic |
| LED Indicator |
| |

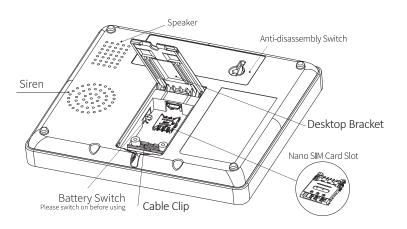

Examples of accessories







Smart Security Panel Rit


















Excellence through Innovation



^図 公路CEF© (

②